

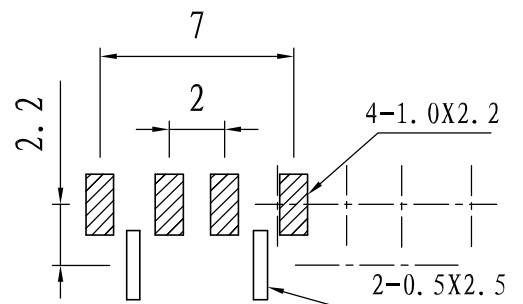
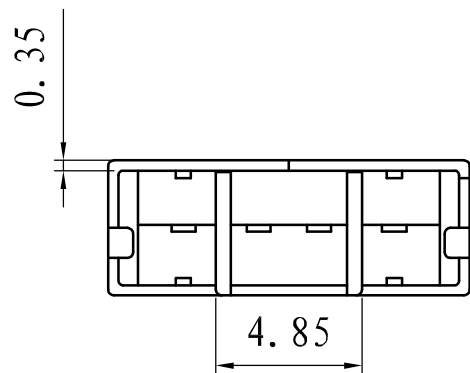
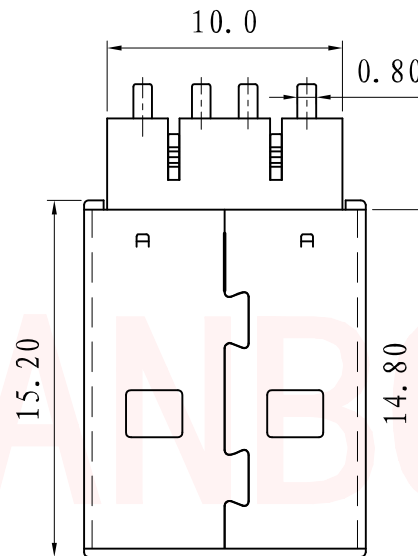


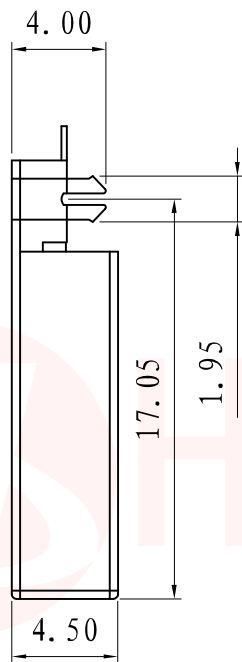

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

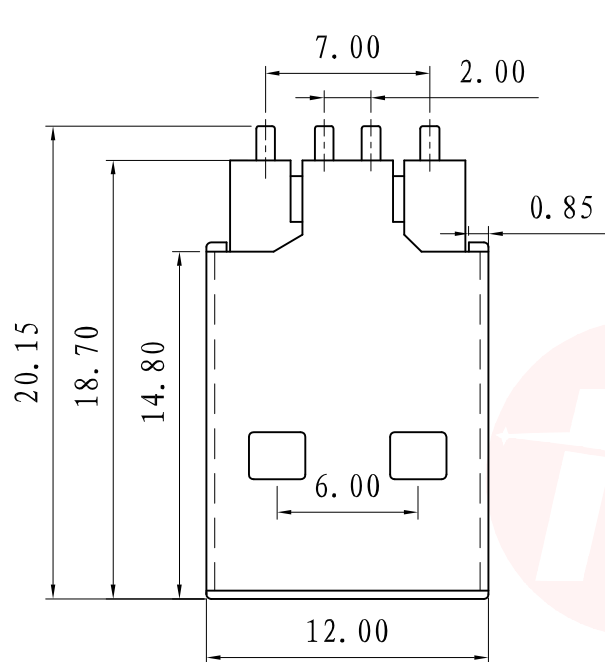

PCB. LAYOUT

说明:

- 电气性能:
- 接触阻抗: 30 毫欧 (最大)
- 绝缘阻抗: 1000 兆欧 (最小)
- 耐高压: 500V AC 一分钟
- 材料:
- 胶芯: PBT/LCP
- 端子: 黄铜C2680
- 外壳: SPCC
- 电镀:
- 端子: 接触区域镀金1u", 焊接区镀亮锡100-200u"
- 外壳: 全区域镀镍50-80u"

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.30 X :±2°
 X.X :±0.20 X.X :±1°
 X.XX :±0.10



东莞市汉博电子科技有限公司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	USB AM SMT 鱼叉型			
DWN	xiong	PART NO. USB-U206-BNS		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:1OF 1	REV: A4

CUSTOMER COPY